


COUPLINGS FOR WIRE AND TEXTILE BRAIDED HOSES MEGACRIMP®

THE WORLD OF COUPLINGS

BSP FBFFX


Female BSP flat face swivel.

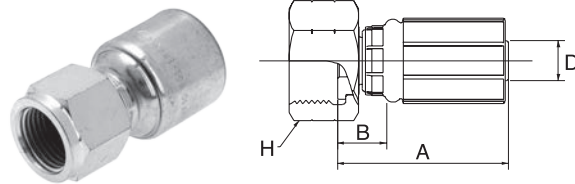

							
D				A	B	H	REF.
-size	DN	"		mm	mm	mm	G
-5	8	5/16	G 1/2" - 14 BSP	45.5	17.5	27.0	5G8FBFFX
-6	10	3/8	G 3/8" - 19 BSP	44.5	16.6	22.0	6G6FBFFX
-6	10	3/8	G 1/2" - 14 BSP	44.0	16.1	27.0	6G8FBFFX
-8	12	1/2	G 1/2" - 14 BSP	53.5	16.0	27.0	8G8FBFFX
-8	12	1/2	G 5/8" - 14 BSP	54.0	16.5	30.0	8G10FBFFX
-8	12	1/2	G 3/4" - 14 BSP	51.5	14.0	32.0	8G12FBFFX
-10	16	5/8	G 3/4" - 14 BSP	52.0	14.5	32.0	10G12FBFFX
-12	20	3/4	G 3/4" - 14 BSP	65.5	14.5	32.0	12G12FBFFX

BSP BSPBJ

BSP banjo.

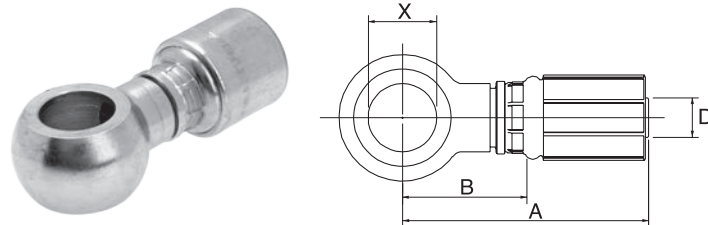

							
D				A	B	X	REF.
-size	DN	"		mm	mm	mm	G
-4	6	1/4	1/4" - BSP	56.0	30.0	13.2	4G4BSPBJ
-4	6	1/4	3/8" - BSP	58.3	32.3	16.8	4G6BSPBJ
-6	10	3/8	1/4" - BSP	58.5	30.6	13.2	6G4BSPBJ
-6	10	3/8	3/8" - BSP	60.0	32.1	16.9	6G6BSPBJ
-6	10	3/8	1/2" - BSP	62.7	34.8	21.0	6G8BSPBJ
-8	12	1/2	1/2" - BSP	75.7	38.2	21.0	8G8BSPBJ
-12	20	3/4	3/4" - BSP	94.7	43.7	26.5	12G12BSPBJ

-4 to -12 size are 10.0 MPa [1450 psi].

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.