


COUPLINGS FOR WIRE SPIRAL HYDRAULIC HOSES GLOBALSPIRAL

THE WORLD OF COUPLINGS

BSP FBSPORX90

Female BSP 'O' ring swivel. 60° cone.
90° swept elbow.

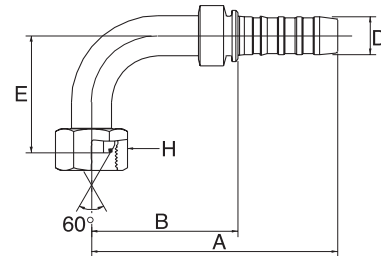


								
D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GS
-6	10	3/8	G 3/8" - 19 BSP	78.0	42.2	32.0	22.0	6GS6FBSPORX90
-8	12	1/2	G 1/2" - 14 BSP	88.0	50.5	37.5	27.0	8GS8FBSPORX90
-10	16	5/8	G 5/8" - 14 BSP	112.5	62.2	46.0	30.0	10GS10FBSPORX90
-10	16	5/8	G 3/4" - 14 BSP	112.5	62.2	60.0	32.0	10GS12FBSPORX90
-12	20	3/4	G 3/4" - 14 BSP	126.0	75.0	60.0	32.0	12GS12FBSPORX90
-16	25	1	G 1" - 11 BSP	151.0	94.6	70.0	41.0	16GS16FBSPORX90
-20	32	1.1/4	G 1.1/4" - 11 BSP	180.5	109.4	80.0	50.0	20GS20FBSPORX90
-24	40	1.1/2	G 1.1/2" - 11 BSP	194.6	121.0	100.0	55.0	24GS24FBSPORX90
-32	50	2	G 2" - 11 BSP	254.7	162.7	129.1	70.0	32GS32FBSPORX90

-6 to -20 size are 42.0 MPa (6000 psi).

BSP MBSP

Male BSP parallel. 60° inverted cone.



							
D				A	B	H	REF.
-size	DN	"		mm	mm	mm	GS
-6	10	3/8	G 3/8" - 19 BSP	63.0	27.2	22.0	6GS6MBSP
-6	10	3/8	G 1/2" - 14 BSP	68.0	32.2	27.0	6GS8MBSP
-8	12	1/2	G 1/2" - 14 BSP	67.5	30.0	27.0	8GS8MBSP
-10	16	5/8	G 5/8" - 14 BSP	84.0	33.7	30.0	10GS10MBSP
-10	16	5/8	G 3/4" - 14 BSP	85.0	34.7	32.0	10GS12MBSP
-12	20	3/4	G 3/4" - 14 BSP	85.0	34.7	32.0	12GS12MBSP
-12	20	3/4	G 1" - 11 BSP	90.0	39.0	41.0	12GS16MBSP
-16	25	1	G 1" - 11 BSP	98.0	41.2	41.0	16GS16MBSP
-20	32	1.1/4	G 1.1/4" - 11 BSP	118.0	46.9	50.0	20GS20MBSP
-24	40	1.1/2	G 1.1/2" - 11 BSP	130.0	56.4	55.0	24GS24MBSP
-32	50	2	G 2" - 11 BSP	148.8	56.8	70.0	32GS32MBSP

-6 to -20 size are 42.0 MPa (6000 psi).

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.