


COUPLINGS FOR WIRE SPIRAL HYDRAULIC HOSES GLOBALSPIRAL

DIN 24° FDLORX90

Female DIN 'O' ring swivel. 24° cone.
Light series. 90° swept elbow.

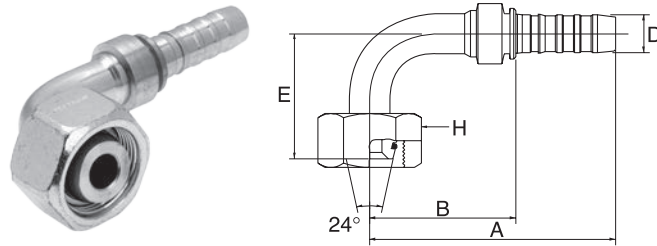


D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GS
-6	10	3/8	M18 x 1.5	78.0	42.2	37.0	22.0	6GS12FDLORX90
-8	12	1/2	M22 x 1.5	88.0	50.5	42.0	27.0	8GS15FDLORX90
-10	16	5/8	M26 x 1.5	113.5	63.2	51.5	32.0	10GS18FDLORX90
-12	20	3/4	M30 x 2.0	126.0	75.0	62.0	36.0	12GS22FDLORX90
-16	25	1	M36 x 2.0	151.0	94.6	70.0	41.0	16GS28FDLORX90
-24	40	1.1/2	M52 x 2.0	194.6	120.9	92.0	60.0	24GSP42FDLORX90

-6 to -16 size are 42.0 MPa (6000 psi).

DIN 24° MDL

Male DIN parallel. 24° inverted cone.
Light series.

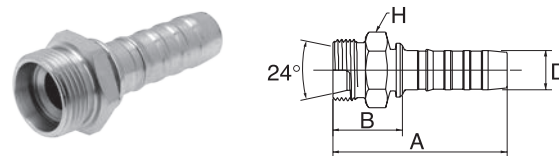

D				A	B	H	REF.
-size	DN	"		mm	mm	mm	GS
-6	10	3/8	M18 x 1.5	60.0	24.2	19.0	6GS12MDL
-8	12	1/2	M22 x 1.5	63.0	25.5	24.0	8GS15MDL
-10	16	5/8	M26 x 1.5	76.5	26.2	27.0	10GS18MDL
-12	20	3/4	M30 x 2.0	79.5	28.5	32.0	12GS22MDL
-16	25	1	M36 x 2.0	90.0	33.2	41.0	16GS28MDL
-24	40	1.1/2	M52 x 2.0	120.0	46.4	55.0	24GSP42MDL

-6 to -16 size are 42.0 MPa (6000 psi).

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.