


# COUPLINGS FOR WIRE AND TEXTILE BRAIDED HOSES MEGACRIMP®

## BSP MBSPP


Male BSP parallel. 60° inverted cone.

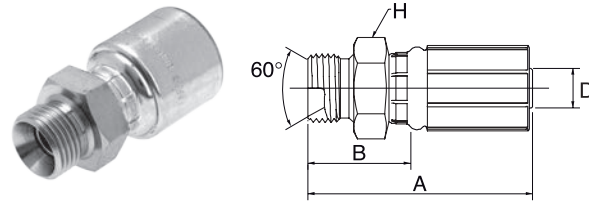

↔			🌀	↔	🌀		
D				A	B	H	REF.
-size	DN	"		mm	mm	mm	G
-4	6	1/4	G 1/4" - 19 BSP	51.5	25.5	19.0	4G4MBSPP
-4	6	1/4	G 3/8" - 19 BSP	48.9	25.8	22.0	4G6MBSPP
-4	6	1/4	G 1/2" - 14 BSP	56.6	33.5	27.0	4G8MBSPP
-5	8	5/16	G 1/4" - 19 BSP	49.4	25.5	19.0	5G4MBSPP
-5	8	5/16	G 3/8" - 19 BSP	49.7	25.8	22.0	5G6MBSPP
-6	10	3/8	G 1/4" - 19 BSP	52.0	24.1	19.0	6G4MBSPP
-6	10	3/8	G 3/8" - 19 BSP	55.0	27.1	22.0	6G6MBSPP
-6	10	3/8	G 1/2" - 14 BSP	60.0	32.1	27.0	6G8MBSPP
-8	12	1/2	G 3/8" - 19 BSP	58.5	26.0	22.0	8G6MBSPP
-8	12	1/2	G 1/2" - 14 BSP	69.0	31.5	27.0	8G8MBSPP
-8	12	1/2	G 5/8" - 14 BSP	71.0	33.5	30.0	8G10MBSPP
-10	16	5/8	G 5/8" - 14 BSP	72.0	34.5	30.0	10G10MBSPP
-10	16	5/8	G 3/4" - 14 BSP	74.0	36.5	32.0	10G12MBSPP
-12	20	3/4	G 3/4" - 14 BSP	90.0	39.0	32.0	12G12MBSPP
-16	25	1	G 1" - 11 BSP	101.0	44.2	41.0	16G16MBSPP
-20	32	1.1/4	G 1" - 11 BSP	104.5	45.5	46.0	20G16MBSPP
-20	32	1.1/4	G 1.1/4" - 11 BSP	110.0	51.0	50.0	20G20MBSPP

## BSP MBSPPBKHD

Male BSP parallel.  
60° inverted cone [Bulkhead].

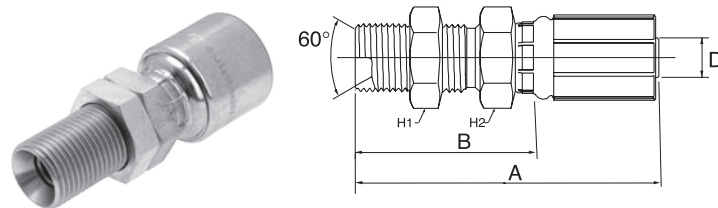

↔			🌀	↔	🌀			
D				A	B	H1	H2	REF.
-size	DN	"		mm	mm	mm	mm	G
-4	6	1/4	G 1/4" - 19 BSP	69.0	43.0	19.0	19.0	4G4MBSPPBKHD
-6	10	3/8	G 3/8" - 19 BSP	75.0	47.1	22.0	22.0	6G6MBSPPBKHD
-8	12	1/2	G 1/2" - 14 BSP	88.5	51.0	27.0	27.0	8G8MBSPPBKHD
-10	16	5/8	G 5/8" - 14 BSP	93.0	55.5	30.0	30.0	10G10MBSPPBKHD
-12	20	3/4	G 3/4" - 14 BSP	109.0	58.0	32.0	32.0	12G12MBSPPBKHD
-16	25	1	G 1" - 11 BSP	121.2	64.4	41.0	41.0	16G16MBSPPBKHD

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.